



ALUMINIUM COMPOSITE PANEL

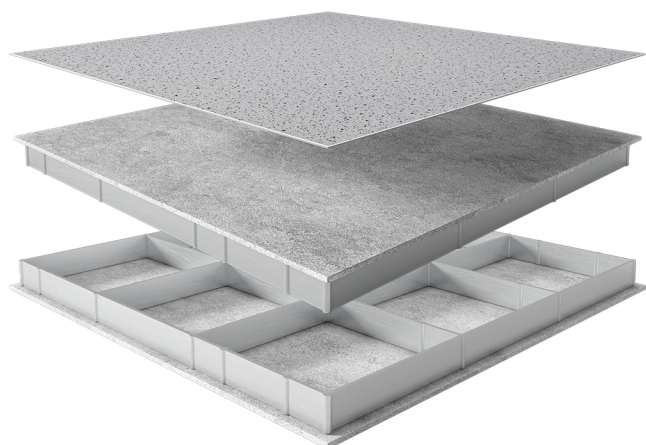

ALUMINIUM COMPOSITE SOLID PANEL

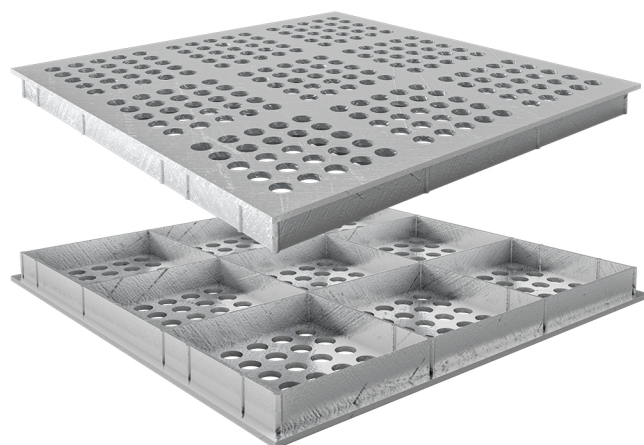

ALUMINIUM COMPOSITE PERFORATED PANEL

TECHNICAL DATA SOLID PANEL

Thickness	: 30 mm
Weight	: ~ 6.5 - 7 kg
Panel Size	: 600 mm x 600 mm x 30 mm

TECHNICAL DATA PERFORATED PANEL

Thickness	: 40 mm
Weight	: ~ 6.8 - 7 kg
Panel Size	: 600 mm x 600 mm x 40 mm

LOAD CARRYING CAPACITY

Type	Open Ratio / Ventilation Ratio	Surface Type	Size	Fireproof Performance	Concantrated Load	Uniform Load	Deflection
mm			mm		N	N	mm
ACPP-0-30	%0	Solid	600-600-30	A	≥20000	≥60000	≤2
ACPP-17-30	%17	Perforated	600-600-30	A	≥10000	≥30000	≤2
ACPP-25-30	%25	Perforated	600-600-30	A	≥7000	≥20000	≤2
ACPP-50-30	%50	Perforated	600-600-30	A	≥4000	≥10000	≤2
ACPP-0-55	%0	Perforated	600-600-55	A	≥30000	≥90000	≤2
ACPP-17-55	%17	Perforated	600-600-55	A	≥15000	≥40000	≤2
ACPP-25-55	%25	Perforated	600-600-55	A	≥10000	≥30000	≤2
ACPP-50-55	%50	Perforated	600-600-55	A	≥6000	≥15000	≤2